
HEBEL POWERFLOOR

PROVIDES A STRONG SOLID FLOORING SOLUTION WITH THE FEEL OF CONCRETE FOR A LOT LESS COST.



Hebel PowerFloor has been developed and assessed for low rise residential flooring systems, which are warranted by CSR Hebel.



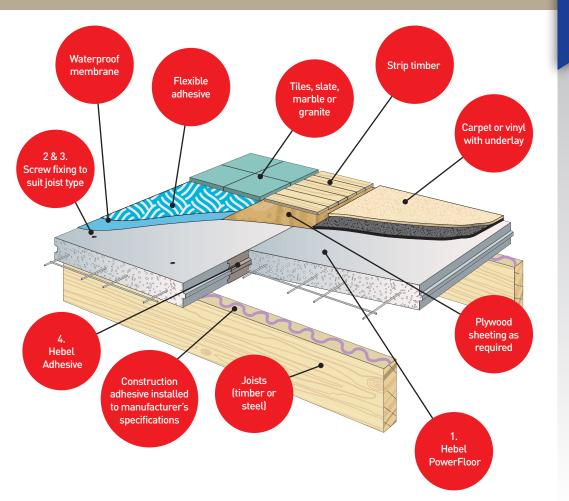

POWERFLOOR FLOORING SYSTEM

This strong and solid flooring system consists of PowerFloor 75mm steel-reinforced tongue and groove panels. These panels are installed over steel or timber joists to provide an outstanding flooring solution for suspended ground floors or mid-floors.

- Fire rating: Up to 90 minutes from above, up to 90 minutes from below (with approved CSR Gyprock ceiling)
- **Acoustic:** R_w+C_{tr} 50 and L_{nw}+C_i 62 (with 13mm Fyrcheck ceiling system, timber flooring cover and 290mm joist depth)
- Thermal: R0.375 m².K/W for 14% M.C for panel only
- Thickness: 75mm (floor panel only)

Note: For further details on performance of Hebel Powerfloor please visit Hebel website or contact Hebel technical services

POWERFLOOR STANDARD PANEL SIZES

75mm thick x 600mm wide x 1800mm long.

FLOORS - HOUSES & LOW RISE MULTI RESIDENTIAL


- offers excellent acoustic performance, minimising noise transference between floors
- easily installed by onsite tradesman such as carpenters
- not affected by weather during installation
- once finished, the Hebel PowerFloor system provides a solid base for just about any floor covering



HEBEL POWERFLOOR



PROVIDES A STRONG SOLID FLOORING SOLUTION WITH THE FEEL OF CONCRETE FOR A LOT LESS COST.

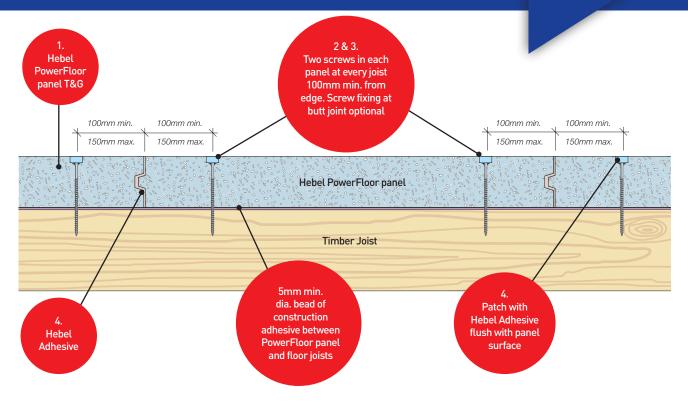

| ITEM | DESCRIPTION | LOCATION |
|------|------------------------------------------|----------------------------------------|
| 1 | Hebel PowerFloor panel – Tongue & Groove | Entire floor |
| 2 | Screw 14-10 x 100MP Bugle Head | Fix PowerFloor to timber joist |
| 3 | Screw 14-10 x 95 Hex Head | Fix PowerFloor to steel joist |
| 4 | Hebel Adhesive | Used for all panel joints |
| 5 | Hebel Anti-Corrosion Paint 500ml | Used to coat exposed reo on cut panels |

